# Installing a DentaPure<sup>™</sup> DP365B Cartridge onto an A-dec<sup>®</sup> Unit



#### 0.7 Liter or 2 Liter

#### 1

Remove the A-dec<sup>®</sup> bottle from the manifold

# 2


Remove two hex screws with 1/8th inch allen wrench


## 3

Separate collar and lift pick-up tube assembly from the bottle

## 4

Align the bottle alongside the pick-up tube to ensure that your DP365B cartridge can attach to the pick-up tube with enough space to fit inside the bottle with 1/4 - 1/2 inch of empty space from the bottom



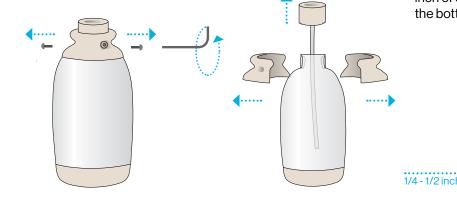



5


Attach the luer fitting onto the pick-up line.



Remove the top and bottom dust caps and attach the cartridge onto the luer fitting.



Place the pick up tube assembly with the cartridge back into the bottle. Reattach the collar to the bottle, replace the hex screws, and replace the A-dec<sup>®</sup> bottle to the manifold







Hu-Friedy Mfg. Co., LLC, 1666 E. Touhy Ave., Des Plaines, IL 60018 | HuFriedyGroup.com All company and product names are trademarks of Hu-Friedy Mfg. Co., LLC its affiliates or related companies, unless otherwise noted.A-dec® is a registered trademark of A-dec, Inc. ©2022 Hu-Friedy Mfg. Co., LLC. All rights reserved.DLIT01532 Rev A 1022

